

Installation Instructions

Solarity™ Motorized Shades with 1-1/2" & 2" Roller Tube

Instructions for motorized shades that include one of the following motors; IQM-AC2, IQM-ACR2, IQM-DCR, IQM-ILT-DC and BAT-R. Motorized Shades come fully assembled and ready for installation. **Mounting screws are not provided.** The type and size of screw required will vary depending upon the mounting surface.

EXPOSED ROLLER SHADE INSTALLATION








1. Determine mounting position of shades. The order width is the bracket to bracket dimension. On inside mounts this is typically the opening width. On outside mounts, mark the location of the brackets. (Outside bracket width = shade width). For proper shade operation, brackets must be mounted perfectly level. The brackets are universal and can be mounted for inside, outside, and ceiling mounts using appropriate holes. Determine operator side as ordered. Mount brackets to wall or ceiling with #6 or #8 x 1 1/2" pan head or hex head screw (not provided).
2. Install the shade by pushing the motor straight onto the blade of its bracket. The motor should be installed so the program buttons and charging or battery ports hang straight down. Lower the lug of the end plug onto the "V" of its bracket. The roller should fit in the brackets securely, with just a little play. Rotate the riveted retainer portion to lock the lug in position.
3. Use attached programming instructions to lower shade and set upper & lower limits.

OPTIONAL ALUMINUM FASCIA INSTALLATION

1. Shades may be installed with fascia. Follow step 1 from above using 3" square mounting brackets instead of standard mounting brackets.
2. Follow steps 2-3 from above for exposed roller.
3. Snap on fascia. Hook the lip in the fascia over the end brackets and swing the fascia down until the bottom of fascia snaps securely into place.

OPTIONAL 3" or 4" CASSETTE INSTALLATION

1. 3" Cassette system is shipped assembled and ready to install in mounting brackets without removing shade from cassette.
2. Install shade mounting brackets. Determine wall or ceiling mount. Mount two outer brackets approximately 1 1/2" – 2" in from the end. On wider units install center bracket(s) supplied.
3. Snap cassette into mounting brackets. Hook top of extrusion into front of mounting brackets as shown in diagram. Rotate the back bottom corner of cassette up and snap into bracket.

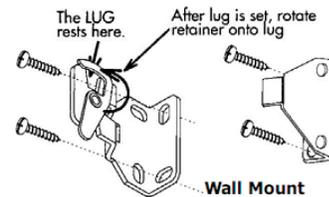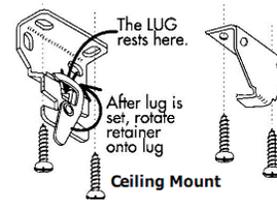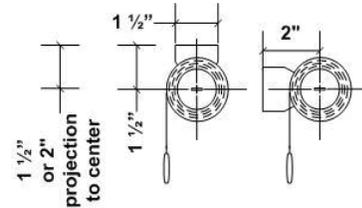

IPC.1526/Rev.1

Installation Questions?

Contact our Installation Hotline 866.EZINPRO

For Sales & Customer Service call 800.222.5556

INPRO
CLICKEZE PRIVACY SYSTEMS

Installation Instructions

Solarity™ Motorized Shades with 1-1/2" & 2" Roller Tube

(To remove cassette, insert flat head screwdriver into mounting bracket slot provided, then back to release cassette.)

4. Use attached programming instructions to lower shade and set upper & lower limits.

TROUBLE SHOOTING-TELESCOPING IN SHADE

1. To adjust shades for telescoping (excessive horizontal movement of fabric while shade rolls up on the tube), roll shade all the way down so tube is exposed (this will require removal of motor down stop limit).
2. Place a 4" piece of tape (2"-4" in from the end of shade) on the side of the tube opposite of the direction the fabric is moving toward.
3. Run the shade up. If shade still telescopes, repeat the process. The correct amount of tape can only be determined by trial and error.
4. Re-set the down limit after shade adjustments are made.

